



Various Stitch Patterns To Unleash Your Creativity!




4-Thread Overlock

Uses 2 needles and 4 threads to securely sew together knitted fabrics.




3-Thread Overlock

This basic stitch of overlock machines prevents fabric from fraying.




3-Thread Flatlock

Use this stitch as an accent on clothes, interior items and accessories.




3-Thread Narrow Overlock

The fabric edge is rolled, then sewn with very narrow overlocking.



3-Thread Rolled Hem

The fabric edge is rolled, then covered with thread.



Frill 3-Thread Rolled Hem With Diff. Feed

Uses 3-thread rolled hemming and the differential feed on stretch fabrics to create richly designed articles.



2-Thread Overlock

Simply sew fabric edges with 2 threads to prevent fraying.

Optional attachments

	Blind Stitch Presser Foot Part No. 40138091		Beading Presser Foot Part No. 40138106
	Universal Blind Stitch Presser Foot Part No. 40149058		Curved Beading Presser Foot Part No. 40149059
	Elasticator Presser Foot Part No. 40138095		Piping Presser Foot Part No. 40138103
	Cording Presser Foot Part No. 40138099		Gathering Presser Foot Part No. 40138121

MO-2000QVP Standard Specifications

Number of Needles	1/2 Needles
Needle	SCHMETZ 130/705 H or JLx2
Number of Threads	2/3/4 Threads
Differential Feed	0.7-2.0 Ratio
Sewing Speed	Maximum 1,500 spm
Easy Threader	X
Light	LED
Presser Foot Lift	5mm (Max: 8mm)
Stitch Length	1-4mm
Overlocking	Left Needle 5-9mm
Width	Right Needle 3-7mm
	Rolled Hem 2mm
Accessories	Needle set 130/705H(SCHMETZ)/ Screwdriver / Tweezers / Brush/needle inserter / Electronic foot control / Nets / Spool caps / Looper threader / Accessory bag / Dust cover / Waste collector / Oiler / Instruction manual / Operation support DVD
Dimensions	330 (W) x 280 (D) x 310 (H) mm
Weight	9.0 kg




JUKI

JUKI CORPORATION

2-11-1, TSURUMAKI, TAMA-SHI, TOKYO
206-8551, JAPAN
<http://www.juki.co.jp>

JUKI ECO PRODUCTS	This is an eco-friendly product which complies JUKI ECO PRODUCTS standards for protecting the environment.
	●The sewing machine complies with the "JUKI Group Green Procurement Guidelines" on the use of hazardous substances, which is stricter than other restrictions, such as those of the RoHS Directive. For details of JUKI PRODUCTS, refer to: http://www.juki.co.jp/eco_e/index.html *The RoHS Directive is an EU Directive limiting the use of 6 hazardous substances (lead, hexavalent chromium, mercury, cadmium, PBB and PBDE) in electrical and electronic equipment. The Juki Green Procurement Guideline is the voluntarily established criteria to eliminate not only the aforementioned six substances, but also other ones which also adversely affect the environment.


JUKI CORPORATION holds the rights to change technical s



CASA LORENTE
TEL.-93 658 13 90
08840 VILADECANS

MO-2000QVP

JUKI

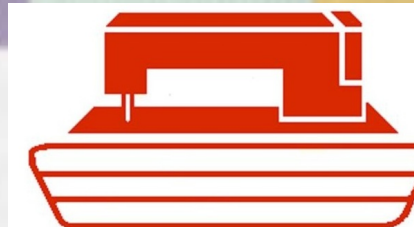

CASA LORENTE
TEL.-93 658 13 90
08840 VILADECANS

QVP
Quilt Virtuoso Pro




Effortless Threading with
the Power of Air

Simplified Serging with
Informational LCD Screen



MO-2000QVP

Air-Supported Threading! Create the Look of a Professional Finish!

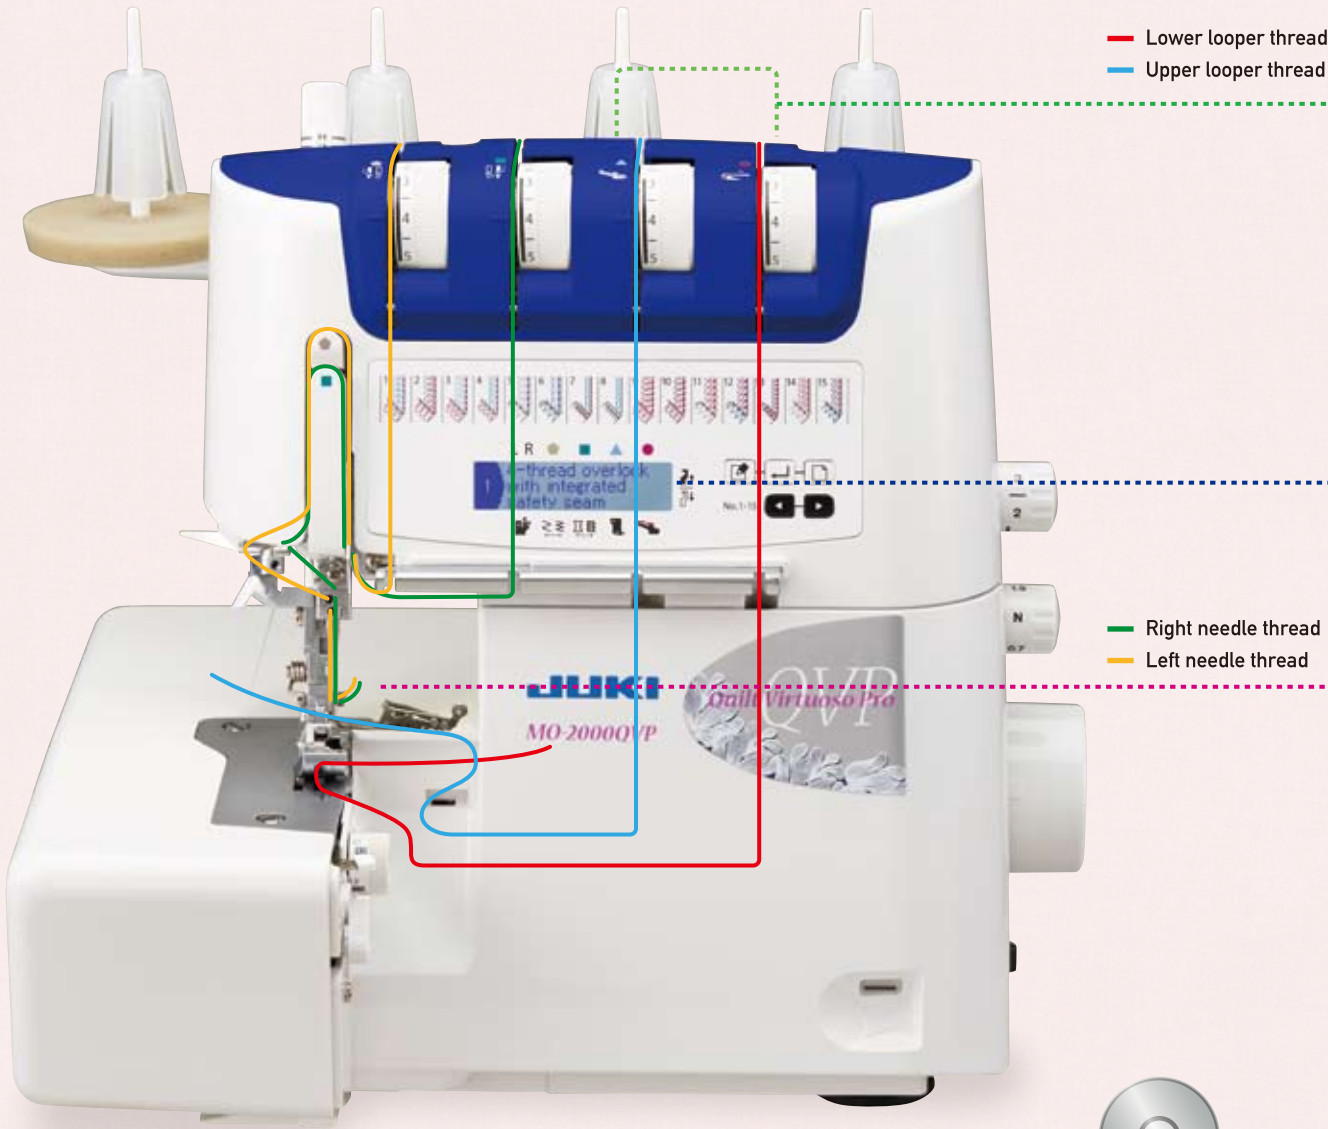

MO-2000QVP

JAN:4946973008253



Operation Support
DVD included

Convenient Threading with the Easy Threader


Using the new easy threader feature, easily thread the machine from the threading hole to the looper with the power of a strong whoosh of air sent from the electric motor. This amazing function dramatically alters upper and lower looper threading.



Step.1 Insert 1 to 2 cm of thread.



Step.2 Press the air-control pushbutton.



Step.3 And you're done!
The machine was simply threaded by air.

Automatic Needle Threader


Quickly thread the needle! With the automatic needle threader, the needle is threaded in 3 easy steps.



Step.1 Lower the threading lever.



Step.2 Hook the thread.




Step.3 Return the lever to finish threading.

NEW!

Informational LCD Screen



Easy set-up instructions including tension settings for 15 different stitches at a glance on the LCD Screen. No more searching through pages of your manual, serging is simplified with the informational LCD screen.




Adjustable Differential Feed

Even with easily stretched fabrics such as knits and georgette, create beautifully sewn finishes by adjusting the differential feed. Adjustments can even be made while sewing.




Beautiful Sharp Curve

The distance between the needle and knife is 9.95mm (conventional model: 15.5mm), allowing you to sew beautiful inside curves.



Upper Looper Converter 2-/3-Thread Conversion

Switch to 2-thread sewing simply by pushing the 2-/3-thread changeover attachment to the left, making this operation even easier.



Wide Throat Area

The height of the throat is 72.4mm. Due to this height, the usability of the work space improved infinitely.



Quiet Operation

The sound reducing design minimizes the operating noise and the unit sews with less vibration.



LED Sewing Light

The needle area is brightly illuminated. The long-life, energy-efficient and eco-friendly light will not heat up, even after a long period of use.



Waste Collector

Provided as a standard accessory, the waste collector catches cut-off fabric and is useful for keeping the area tidy.

Other Useful Features

- Automatic rolled hemming
- Adjustable presser foot pressure
- Option to deactivate upper knife
- Cutting width adjusting dial
- Safety feature preventing operation when the presser foot is upper position or the cover is open.
- Thread trimming blade for easy thread cutting.